



**Fraunhofer** Institut  
Techno- und  
Wirtschaftsmathematik

T. Hanne, T. Melo, S. Nickel

Bringing robustness to patient flow  
management through optimized  
patient transports in hospitals

© Fraunhofer-Institut für Techno- und Wirtschaftsmathematik ITWM 2007

ISSN 1434-9973

Bericht 131 (2007)

Alle Rechte vorbehalten. Ohne ausdrückliche schriftliche Genehmigung des Herausgebers ist es nicht gestattet, das Buch oder Teile daraus in irgendeiner Form durch Fotokopie, Mikrofilm oder andere Verfahren zu reproduzieren oder in eine für Maschinen, insbesondere Datenverarbeitungsanlagen, verwendbare Sprache zu übertragen. Dasselbe gilt für das Recht der öffentlichen Wiedergabe.

Warennamen werden ohne Gewährleistung der freien Verwendbarkeit benutzt.

Die Veröffentlichungen in der Berichtsreihe des Fraunhofer ITWM können bezogen werden über:

Fraunhofer-Institut für Techno- und  
Wirtschaftsmathematik ITWM  
Fraunhofer-Platz 1

67663 Kaiserslautern  
Germany

Telefon: +49(0)631/3 1600-0  
Telefax: +49(0)631/3 1600-1099  
E-Mail: [info@itwm.fraunhofer.de](mailto:info@itwm.fraunhofer.de)  
Internet: [www.itwm.fraunhofer.de](http://www.itwm.fraunhofer.de)

# Vorwort

Das Tätigkeitsfeld des Fraunhofer-Instituts für Techno- und Wirtschaftsmathematik ITWM umfasst anwendungsnahe Grundlagenforschung, angewandte Forschung sowie Beratung und kundenspezifische Lösungen auf allen Gebieten, die für Techno- und Wirtschaftsmathematik bedeutsam sind.

In der Reihe »Berichte des Fraunhofer ITWM« soll die Arbeit des Instituts kontinuierlich einer interessierten Öffentlichkeit in Industrie, Wirtschaft und Wissenschaft vorgestellt werden. Durch die enge Verzahnung mit dem Fachbereich Mathematik der Universität Kaiserslautern sowie durch zahlreiche Kooperationen mit internationalen Institutionen und Hochschulen in den Bereichen Ausbildung und Forschung ist ein großes Potenzial für Forschungsberichte vorhanden. In die Berichtreihe sollen sowohl hervorragende Diplom- und Projektarbeiten und Dissertationen als auch Forschungsberichte der Institutsmitarbeiter und Institutsgäste zu aktuellen Fragen der Techno- und Wirtschaftsmathematik aufgenommen werden.

Darüber hinaus bietet die Reihe ein Forum für die Berichterstattung über die zahlreichen Kooperationsprojekte des Instituts mit Partnern aus Industrie und Wirtschaft.

Berichterstattung heißt hier Dokumentation des Transfers aktueller Ergebnisse aus mathematischer Forschungs- und Entwicklungsarbeit in industrielle Anwendungen und Softwareprodukte – und umgekehrt, denn Probleme der Praxis generieren neue interessante mathematische Fragestellungen.



Prof. Dr. Dieter Prätzel-Wolters  
Institutsleiter

Kaiserslautern, im Juni 2001



# Bringing Robustness to Patient Flow Management Through Optimized Patient Transports in Hospitals

Thomas Hanne

School of Business, University of Applied Sciences Northwestern Switzerland,

CH-4600 Olten, Switzerland, thomas.hanne@fhnw.ch

Teresa Melo

Fraunhofer Institute for Industrial Mathematics, and Department of Business Administration,

University of Applied Sciences, D-66123 Saarbrücken, Germany, teresa.melo@htw-saarland.de

Stefan Nickel\*

Fraunhofer Institute for Industrial Mathematics, and Chair of Operations Research and

Logistics, Saarland University, D-66041 Saarbrücken, Germany, s.nickel@orl.uni-saarland.de

## Abstract

Intra-hospital transports are often required for diagnostic or therapeutic reasons. Depending on the hospital layout, transportation between nursing wards and service units is either provided by ambulances or by trained personnel who accompany patients on foot. In many large German hospitals, the patient transport service is poorly managed and lacks workflow coordination. This contributes to higher hospital costs (e.g. when a patient is not delivered to the operating room on time) and to patient inconvenience due to longer waiting times. We have designed a computer-based planning system - Opti-*TRANS*<sup>©</sup> - that supports all phases of the transportation flow, ranging from travel booking, dispatching transport requests to monitoring and reporting trips in real-time. The methodology developed to solve the underlying optimization problem - a dynamic dial-a-ride problem with hospital-specific constraints - draws on fast heuristic methods to

---

\*Corresponding author.

ensure the efficient and timely provision of transports. We illustrate the strong impact of Opti-*TRANS*® on the daily performance of the patient transportation service of a large German hospital. The major benefits obtained with the new tool include streamlined transportation processes and workflow, significant savings and improved patient satisfaction. Moreover, the new planning system has contributed to increase awareness among hospital staff about the importance of implementing efficient logistics practices.

Medical diagnostic facilities and treatment units are among the most daily visited departments of a hospital, both by inpatients and outpatients. In particular, inpatients with limited mobility are accompanied by trained staff from and to these service areas. If intra-hospital movement is required between health care units within the same building then patients are pushed on gurneys, beds or wheelchairs. In campus-based hospitals, inter-building transportation is provided by appropriate vehicles, mostly ambulances, which can be shared by several patients.

The organization and provision of intra-hospital transportation for patients, as well as for supplies and equipment, are among the daily logistics activities conducted in a hospital. Although these ancillary services seem simple and straightforward, they impact significantly on the quality of health care and on hospital costs. For example, the late delivery of a patient to a high cost service facility, such as an operating theater or a magnetic resonance imaging department, leads to the underutilization of valuable (staff and equipment) resources. In addition, it disrupts the initially planned schedules of these units. On the other hand, missing an appointment often results in extended waiting time for the patient or even in rescheduling the appointment, thus impacting negatively on patient satisfaction.

Despite its importance, the role played by logistics is often overlooked by health care organizations. A recent study by Landry and Philippe (2004) has revealed that logistics related activities account for about 46% of a hospital's total budget. The continuously increasing pressure on the German health care system through the recent implementation of clinical pathways and diagnosis related groups calls for streamlined processes in hospitals. Transportation services cannot be excluded from this. Hence, the aim of this paper is to contribute to the implementation of efficient logistics practices for intra-hospital transportation. We start by describing our experience in two major hospitals which helped us identify the major problems, analyze planning needs and assess the optimization potential of using operations research-based methods. We then describe the development of Opti-*TRANS*®, a computer-based planning system, that supports all parties involved in the transportation workflow, ranging from nurses, transportation

staff, dispatchers to logistics managers and financial controllers. Our approach stems from the practical experience gathered over the past few years through conducting projects in a number of large German hospitals. The new system covers the complete workflow, including travel booking, scheduling, dispatching, monitoring, and reporting transports. The optimization routines include various heuristic methods specially tailored to handle the complexity of the underlying routing and scheduling problem. We illustrate how the new system helped improve considerably the performance of the patient transportation service at the Municipal Clinics Frankfurt am Main-Höchst, a large hospital that was involved during the software development process. Since the hospital started using the new software, it has experienced significant savings with improved patient satisfaction.

## **Common Practices in Intra-hospital Transportation**

Many German hospitals have a central patient transportation department (PTD), which is responsible for the coordination and provision of transportation for inpatients. The core of a PTD is the central dispatch office where new requests for transportation are received while vehicles or transport teams operating on foot are en-route servicing other requests. As we will show, much of the day-to-day running of the operations is paper based, fairly ad-hoc and lacks workflow coordination.

A patient care unit or a service department books a request by calling the dispatcher at the PTD, who enters the relevant data (e.g. patient information, origin and destination, specific transport requirements) on paper. Dispatching decisions are usually based on the dispatcher's intuition and expertise. In most cases, he assigns a new request on a first-come-first-served basis to the next available vehicle or transport team and adds this information to his handwritten notes (see Figure 1). Urgent requests are handled separately, normally by immediately notifying a given vehicle via beeper or hand-held radio transceiver.

After completion of a transport, the vehicle crew calls the dispatcher to receive the next assignment. Often, the dispatcher consigns multiple requests to a vehicle or team which only reports back to the PTD after having completed all jobs. This modus operandi has a number of shortcomings:

1. The phone line tends to get busy during peak hours (specially in the morning) so that calls for new requests do not get through. As a result, many transport bookings only reach

	Jäger	Nett
<b>Fahrdienst</b>	Col- Endos	Col- Endos Iso
Schmitt Ute	(Edeli) Wiese	(Knopp) SW frub
H2- Kardiothab	W4- ISO	+13- Sono
(Knopp) Lauf	8 <sup>00</sup> (Ralf) SW	8 <sup>30</sup> (Fegor) SW
Engel	Scheibel	Stierke
Jo- Endos	+13- Sono	W3- Dial
10 <sup>45</sup> (Kehl)	13 <sup>45</sup> (Sigo) SW	(Fenn) SW Arslankepe
CG- Am's	E4- HNOOP	A06- Dial
(Kehl)	(Beyr)	(Felix)
Reichmann	Schumacher	Ebert
H1- Sono	Je- HBL3	K2- Sono
8 <sup>45</sup> (Beyr) Lauf	(Fenn)	13 <sup>45</sup> (Edeli) Beyr W

Figure 1: An example of handwritten notes describing transport requests and their assignment to PTD staff (these notes stem from one of the hospitals that we visited).

- the dispatcher very close to their desired time for pickup or even too late. Moreover, this communication mode is particularly unsuitable for urgent transports;
2. Since the phone line is frequently busy, it is difficult for a hospital unit to cancel or change the data of a previously booked request in time;
  3. Due to the fact that the dispatcher only assigns incoming requests to vehicles without specifying the sequence in which the service points are to be visited (this decision is made independently by each crew), the duration of each route is unknown and therefore, the dispatcher cannot estimate when a vehicle will be available again;
  4. Hospital units have restricted access to the status of their booked requests. In particular, they are not informed in advance of the expected time of pickup of a patient. This is, however, important when some preparatory procedures need to be carried out prior to the transport (e.g. special equipment is required, the patient needs certain medication);
  5. PTD staff (including the dispatcher) are often overloaded, or at least workload is distributed unevenly over the vehicles and teams;



6. To avoid empty trips, sometimes staff carry patients without explicit notification from the dispatcher. As a result, double dispatching occurs when the request is assigned to another vehicle;
7. In the absence of an electronic order processing system it is not possible to automatically create management records of the completed journeys by the end of the day. Consequently, service quality cannot be measured.
8. Transports are frequently delayed resulting in waiting times for patients, idle times in service departments awaiting the patients, and underutilization of staff and vehicles. However, exact figures are unknown due to the previous remark.

The above list, which is by no means exhaustive, includes issues that were repeatedly reported by all hospitals that we visited. To understand the degree to which inconvenience can be caused to patients, we monitored closely in-house transports in a university hospital with a bed capacity of about 1,500. Figure 2 shows the waiting time experienced by each patient that was serviced by the PTD on a given day. About 25% of the patients waited longer than 30 minutes for their transport. Some patients even waited more than two hours.

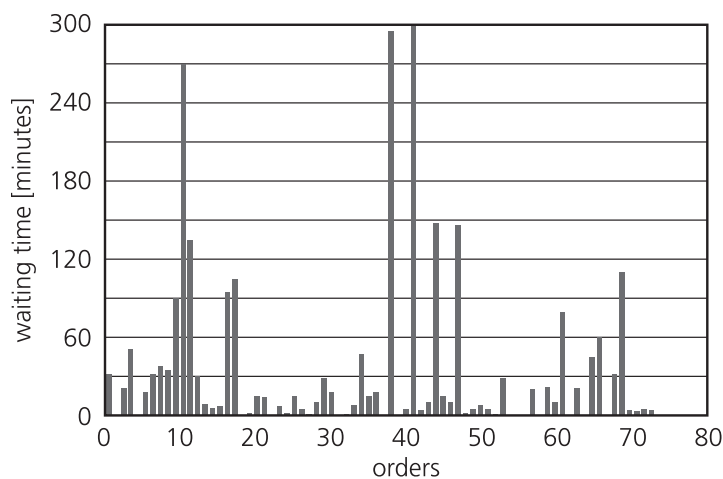


Figure 2: Example of patience inconvenience as a measure of waiting time (in minutes). For each of the 81 patients, the corresponding waiting time is determined by the difference between the desired time for pickup and the actual collection time by the transport team.

# The Patient Transportation Problem

In the last few years we visited several German hospitals with a bed capacity of at least 800 and gathered information on their patient transportation services. We realized that prior to the development of a support system, we needed to get a clear understanding of the core problem. We summarize next the main features of the transportation problems encountered. We believe that for the most part, they are prevalent not only in Germany but also in other hospitals all over the world.

Each request for transportation has an origin location where the patient is picked up (e.g. nursing ward), a destination location where the patient is dropped-off (e.g. CT scan room), and a desired time window either for pickup or delivery. Upon order entry, further information is conveyed to the PTD for the appropriate provision of transport. This includes the required transportation mode (e.g. gurney, wheelchair), the priority level of the transport (e.g. urgent, elective), the maximum ride time, the necessary equipment (e.g. respiratory support equipment), and medical or nursing staff who must accompany the patient during the transport. Finally, patient isolation may be requested to prevent spread of infection. In this case, the ambulance cannot be shared with other patients and PTD staff need to take additional precautionary measures.

Depending on the hospital layout (i.e. a central building as opposed to a campus with several buildings), intra-hospital transports are provided by specially equipped vehicles, typically ambulances, or by staff operating on foot. In some hospitals both transportation modes are available. Vehicles and staff may be housed in different depots or locations on the hospital campus. An ambulance is normally operated by a team of two people, while escorting patients inside the buildings requires a single transporter. For convenience, we will use the term *vehicle* to denote any transportation resource. Vehicles differ in equipment, design and size. For example, portable ECG devices, respiratory support equipment, and gurneys may not be available in all vehicles. A vehicle may also have alternative loading modes depending on its size and design. For instance, it could transport one patient on a gurney and one wheelchair-seated patient simultaneously. If the vehicle transports two wheelchair-seated patients then there is no additional space for a gurney. Therefore, vehicles have so-called disjunctive multi-dimensional capacities. Finally, some hospitals have a designated vehicle for transport of patients on isolation. After completion of the transport, the vehicle's interior is disinfected and the vehicle becomes unavailable during a given time period.

PTD staff have rotating duties usually comprising of three work schedules covering morning, afternoon and night shifts on a seven-day week basis. Contractual terms stipulate the number and duration of rest breaks during each shift. However, breaks are often not built into the rosters but allocated as and when they can be taken within a pre-specified time window. When the PTD does not operate during night, weekend and holiday hours, transports are either subcontracted to a private ambulance service or carried out by nursing staff. The tasks performed by a transporter include: transferring and/or assisting the patient in and out of bed, gurney or wheelchair; loading and unloading the patient into and out of the vehicle; accompanying the patient during the whole duration of transport; and performing standard vehicle cleaning procedures after completion of each transport. When staff members have different qualifications, the provision of specific transports is limited to authorized personnel.

Given the above characteristics, the aim of the PTD is to provide an efficient and timely transport service to intra-hospital requests. The daily tasks of the dispatcher bear strong resemblance to solving a dial-a-ride problem (DARP) in a dynamic environment where new events occur as time unfolds. However, the patient transportation problem is more complex than the classic DARP due to the presence of hospital-specific requirements.

The DARP belongs to the class of pickup and delivery problems with time windows (PDPTW), Cordeau et al. (2006). In contrast to the standard PDPTW, the DARP focuses on reducing user inconvenience. This objective is often controlled by imposing a limit on the ride time of each user (i.e. the time spent by a user in a vehicle), on the excess ride time (i.e. the difference between the actual and the minimum possible ride time of a user), and on deviations from the desired times for pickup and delivery. Maximizing service quality (i.e. minimizing user inconvenience) is weighed against minimizing fleet operating costs, the latter being related to the number of vehicles used, total route duration and total distance traveled. We refer the reader to the excellent survey by Cordeau and Laporte (2007) for details on the DARP.

## **Measuring Patient Inconvenience and Hospital Costs**

As in the DARP, the patient transportation problem also aims at determining a set of vehicle routes and schedules that balance the above conflicting objectives subject to a number of side-constraints. Recently, Paquette et al. (2007) discussed extensively the notion of service quality in dial-a-ride services and surveyed different measurement scales used in practice. Based on discussions with logistics managers, dispatchers and financial controllers, as well as our own

observations, we developed the following set of performance indicators to assess the quality of a solution to the problem: 1. total lateness; 2. total earliness; 3. total driving time; 4. total transport time for patients.

The first objective is related to patient inconvenience. Although each transport request is booked with a time window, either for pickup at the origin or for delivery at the destination, deviations to the latest desired time are allowed but penalized. The penalty factor incurred for late pickup or delivery depends on the priority level of the request. Lateness may also impact negatively on hospital indirect costs. This is the case when the destination point is a service department (e.g. operating theater), since late delivery results in equipment and staff underutilization. The second objective is related to fleet operating costs. If the vehicle arrives before the lower time limit set for the transport, it is common practice to wait. This is due to the fact that patients often need to be prepared for transport by the nursing staff, specially when the designated origin is a bed ward. Hence, early arrivals cause idle time for the vehicle crew and thus, yield increased direct costs. A penalty factor is imposed on early arrival. The third objective - driving time - can be seen as a cost criterion measuring the utilization level of vehicles and teams. Finally, transport time is a measure of patient satisfaction since it corresponds to the actual duration of a patient transport from the origin to the destination. The overall objective is to minimize a weighted sum of the above four criteria. The weights assigned to these criteria reflect hospital preferences on individual objectives. For example, a hospital that operates its own fleet of ambulances usually gives more importance to cost effectiveness (criteria 2 and 3), while a hospital working with an external ambulance provider tends to give preference to patient convenience (criteria 1 and 4).

## **Real-time Decision Making**

In all hospitals that we visited, the patient transportation problem exhibited a high degree of dynamism due to unforeseen events. The most common sources of uncertainty are: (a) The majority of the transport requests are not known in advance (typically less than 10% are booked the day before). The number of bookings increases considerably after the morning ward rounds with physicians, in particular to diagnostic and treatment units. (b) Requirements of previously booked requests may change (e.g. a procedure takes longer than expected thus postponing the desired time window for picking the patient up) or orders may be even canceled. (c) The exact arrival and departure times in each location are not known in advance. This is due, for example,

to elevator congestion during certain periods of the day. (d) A PTD staff member is absent from work due to illness, a vehicle breaks down or has an unscheduled rest period.

As time unfolds and new information reaches the central dispatch office, previously planned routes need to be modified and updated by the dispatcher in real-time. During peak activity periods, the dispatcher often resorts to ad-hoc decisions, without fully understanding their ramifications. Moreover, decisions made at an early stage of the planning horizon may affect the possibility of making good decisions at a later stage.

## **Analyzing Planning Needs and Optimization Potential**

Two of our early projects provided the first step towards understanding the optimization problem, identifying weak points in the transportation workflow, assessing the optimization potential of operations research-based methods, and analyzing the practical needs for a transportation planning system. The starting point of our research and development work was the Saarland University Hospital, a health care organization located in south-west Germany with about 1,300 beds. The hospital campus spreads over a large area with more than 100 buildings. A heterogeneous fleet of 11 hospital-owned ambulances transports up to 400 patients daily. Each ambulance is operated by a team of two people, comprising the driver and an assistant, who work day shifts from Monday to Friday. At night and on weekends transports are provided by a private ambulance service.

The hospital supplied data regarding all requests serviced during a given month in 2001. The data included the characteristics of each request (required transportation mode, accompanying personnel, equipment, etc.) along with the corresponding booking time. A first analysis of the data showed that the majority of the daily transports (about 98.5%) were provided to elective patients while the remaining 1.5% referred to urgent requests. Moreover, a comparison between the booking time and the desired time window at the origin of each transport revealed that there was no strict policy on request notification: almost half of the bookings reached the dispatch office at most ten minutes before their desired earliest pickup time and only 3.8% were ordered one day in advance. Furthermore, the data did not include the actual arrival and departure times at/from each location visited by a vehicle and thus, it was not possible to reconstruct the routes of the ambulances. This lack of information was due to the fact that the dispatcher assigned multiple requests to a vehicle without specifying the sequence in which each service location should be visited. In other words, routing and scheduling decisions were made by each

ambulance crew and the dispatcher was only contacted after the completion of a batch of jobs. Hence, both ride and dwell times were not known, the latter being defined as the time dedicated by PTD staff to assisting the patient at the origin and destination locations.

Although management records of the completed journeys by the end of the day were not available, both patients and hospital staff complained that transports were frequently delayed. This caused excessive waiting time for patients as well as underutilization of equipment and staff at the therapeutic and diagnostic units awaiting the patients. Since exact figures could not be produced, the logistics department asked us to look into the problem, identify the bottlenecks and suggest various ways of improving the service quality of the PTD.

We decided to develop a simulation model to reproduce the behavior of the patient transportation system. Simulation has become a popular managerial tool in health care organizations in the last years, Jacobson et al. (2006). Our choice was guided by the following objectives: (i) the performance of the system could be measured by a set of quality criteria previously discussed with the hospital; (ii) using the visual interface of the simulation software, a realistic reproduction of the patient transportation system could be conveyed to the decision-makers, thus enhancing the acceptance of the model; (iii) different scenarios could be simulated and their outcome could be evaluated with respect to various performance measures; (iv) the simulation would help us understand better how the transportation service works and later support the development of optimization-based methods.

Prior to developing a discrete-event simulation model, further data were collected with the assistance of the PTD. In addition to data on the actual ambulance routes over several days, we also gathered information on the layout of the campus and its 9.3 mile road network. We estimated vehicle ride times and the statistical distribution of dwell times depending on patient mobility. Figure 3 shows a snapshot of the simulation model.

Our simulation study confirmed some previously held beliefs and shed new light on other issues, Beaudry et al. (2006). We realized that the poor management of transport bookings was to a great extent responsible for the long waiting times experienced by patients and hospital staff. Most of the demand for transportation originated for appointments at diagnostic and treatment units. Bed wards contacted these units to set up the appointments, which were normally granted for the same or the following day. Nursing wards were responsible for communicating their transport needs to the PTD and although this information was usually available in advance, in most cases it was conveyed quite late. Moreover, the PTD was almost never notified as soon as an appointment was made. Another aspect which was also impacting negatively on the

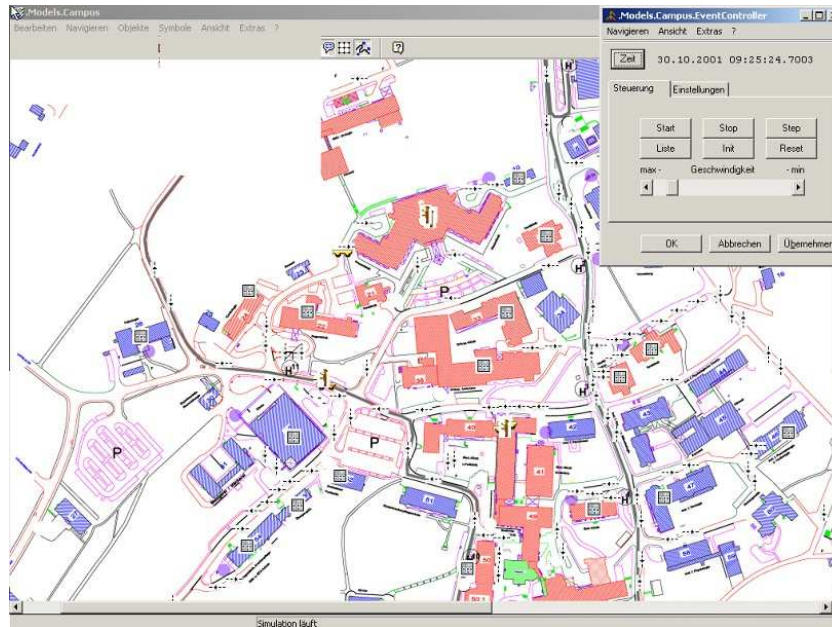


Figure 3: The simulation model of the patient transportation service University Hospital (the model was developed with the software eM-Plant<sup>©</sup>).

service quality of the PTD was the limited means of communication between the vehicles and the dispatch office (radio transceivers were used).

Finally, we run the simulation with a simple heuristic procedure to assess the optimization potential (a more sophisticated method will be described in the section “OR Methodology”), and realized that patient waiting times could, on average, be decreased by 20% with a 10% travel time reduction. We observed similar findings in a second university hospital. This is the large organization reported in Figure 2. The outcome of embedding a simple heuristic in the simulation model that we developed for that hospital is shown in Figure 4. Compared to manual dispatching rules, the optimization-based procedure could, on average, reduce patient waiting time by 26%.

Through the two projects briefly described we identified a number of problems faced by the hospitals. We realized that although operations research-based methods could greatly enhance the performance of the PTD, optimization alone could not resolve all the flaws in the system. Transportation processes and workflow required major streamlining. To support all planning and operational phases we decided to develop a planning system. We describe next the main features of the system and in particular the optimization approach for real-time dispatch of vehicles. Furthermore, we illustrate the impact achieved with the new system in a large German

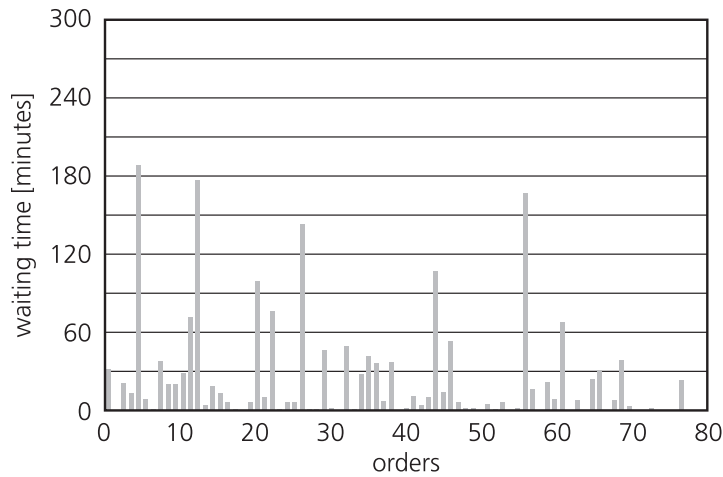


Figure 4: Improved patient satisfaction through reduction of waiting time as a result of using a simple heuristic approach (cf. Figure 2 which displays the waiting time obtained with manual dispatching rules).

hospital which was involved during the software development process.

## Opti-TRANS<sup>©</sup>: A Transport Planning System

Opti-TRANS<sup>©</sup> is a software application designed to support all phases of the transportation flow, ranging from request booking, scheduling, dispatching to monitoring and reporting ([www.opti-trans.com](http://www.opti-trans.com)). While we focused on the development and implementation of the optimization procedures, two other partner companies, SIEDA in Germany and COMEXAR Engineering in Switzerland, focused on the graphical user interface (GUI), data management system and interfaces to the hospital information system (HIS).

Prior to its deployment, the software has to be configured to meet the specific requirements of the hospital. This comprises storing baseline data in a central database, that is, all relevant data regarding the hospital layout and the availability of transportation resources. For example, the nursing and service units involved in transportation have to be defined along with their location (building, floor) and opening hours. Regarding the PTD, vehicles and staff need to be specified together with their attributes (vehicle capacities, work schedules and individual skills of transporters). To be able to automatically create routes and schedules, the software relies on a detailed representation of the road network of the hospital campus as well as of walkways



and elevators inside the buildings. In addition, estimated travel and walking times are stored in the database. The system is configured to search for fastest routes and can take into account differing traffic conditions at different times of day (e.g. longer walking times in the morning due to elevator congestion) as well as the availability of certain paths for given transportation modes (e.g. access to a building via a ramp, elevator not suited for bed use).

Transport requests are booked over the hospital intranet system via a standard order form - the software is fully web-based and a client installation is not necessary (see Figure 5). Patient

Figure 5: Booking form for patient transport in Opti-TRANS<sup>®</sup>. The system can also be used to efficiently move equipment, samples and supplies (see left-hand side of snapshot).

related information can be retrieved from the HIS, thus eliminating the need for typing all patient data. Booking can be made for immediate or future transportation. In addition, transport needs (e.g. medical escort, equipment) and other information (e.g. priority level) are selected from a list of alternatives. Transport requests can also be pre-registered for later completion. Nursing wards and service departments can access information about the status of their requests at any time. They can also modify or cancel their bookings as long as service has not begun.

Upon order entry, the system automatically suggests a suitable vehicle and schedules the request in its current route, based on trip requirements (pickup and drop-off locations and times), available transportation resources, calculated travel times, and existing commitments

to other requests. Although planning is completely automatic, the dispatcher is always able to make adjustments by altering a route and rescheduling assignments. Trip allocations and routing plans are revised by the software in response to events, as they occur in real-time, and to changes in the spatial and temporal patterns of demand. The dispatcher can continuously monitor the precise situation of transportation activity regarding vehicles on duty, scheduled trips, and driver assignments. As a result, he is able to track all transports, and to identify and respond to unforeseen events in real-time (e.g. the treatment of a patient is not finished by the expected time and so the transport has to be postponed). Different colors to reflect the status and priority of each booking are displayed on screen.

The quality of the routes and schedules produced by the optimization procedures is to a large extent influenced by the possibility of establishing communication between the dispatcher and the vehicles at any time. The software supports various communication modes such as DECT (Digital European Cordless Telephone), PDA (Personal Digital Assistant) and hand-held computers. These devices are not only used by the dispatcher to assign new requests to vehicles but also by transporters to provide information on the actual pickup/drop-off times, communicate their current position, and confirm the status of the current travel request.

Finally, comprehensive and flexible reporting tools are available for standard as well as customized queries regarding the completed journeys (e.g. list of trips, time of pickup/collection on a vehicle basis, average travel delays and times, workload of vehicles, etc.). Reporting supports reviewing processes, quality management and continuous improvement of the service provided by the PTD.

## **OR Methodology**

The patient transportation problem is a DARP with several complicating constraints due to hospital-specific requirements. Most research on the DARP has been devoted to the static version of the problem where all user requests are known in advance and as a result, vehicle routes can be planned ahead of time. Metaheuristics are among the most popular solution procedures for solving the static DARP. Efficient tabu search algorithms were developed by Cordeau and Laporte (2003), Aldaihani and Dessouky (2003), and Melachrinoudis et al. (2007). Toth and Vigo (1997) proposed a tabu thresholding algorithm while alternative heuristics based on simulated annealing and on genetic search were designed by Baugh et al. (1998) and Jørgensen et al. (2007), respectively. The dynamic variant of the DARP has received much less attention.

While it makes sense to run an algorithm for a few hours in a static context, a dynamic environment calls for a trade-off between solution quality and response time. Parallel computing is a natural way of reducing computing time as shown by Attanasio et al. (2004).

Opti-*TRANS*<sup>©</sup> includes several optimization routines that can be combined depending on the time available for planning. Typically, during morning peak hours much faster response times are required compared to afternoon or night periods. Upon order entry, a decision must be taken about the allocation of the new request to a particular vehicle and its scheduling within the vehicle's planned route. Two alternative ways are considered for request assignment. The *load balancing* (LB) strategy aims at distributing workload evenly over all vehicles. Therefore, vehicles are sorted by increasing number of assigned requests. Ties are broken by taking the vehicles in increasing order of their earliest possible time to service a new request. A new booking is then assigned to the first feasible vehicle according to these criteria. A vehicle is regarded to be feasible if it has enough capacity, appropriate equipment and suitable working hours to service the request, independently of its current scheduled trips. Alternatively, a *best fit* (BF) strategy can be used by considering every feasible vehicle for the new request. The suitability of each vehicle is then assessed by scheduling the request within its current route according to a given strategy (see below). The best route with respect to the weighted sum of the four objectives previously described is then selected. Although this approach is more time consuming than the LB strategy, it increases the chances of finding a better solution.

Upon assigning a request to a vehicle, routing and scheduling decisions are to be made. Again, we developed three alternative strategies. *First fit* (FF) mimics the hand-made schedules produced by the dispatcher. It consists of inserting the request in the first feasible position in the vehicle route. A more promising approach is to consider all feasible insertion positions without modifying the scheduled times (i.e. estimated arrival and departure times) of already planned stops in the route. The best feasible alternative in terms of route quality is then chosen. We call this the *best fit* (BF) strategy. Finally, a *best insert* (BI) scheme is also available which examines the impact of inserting the request in any position in the route, even if that means having to adjust the planned arrival and departure times of other stops in the route. The sequence of stops already in the route is always maintained in this strategy.

Recently, we have also developed an evolutionary algorithm (EA) as an alternative to the various combinations of the above strategies. The basic idea of an EA is that there is a set of entities (called a population) which represent solutions to the optimization problem under consideration. This set of entities evolves through a number of generations. In each generation

step, an offspring population is created using data of the previous population (the parents) and random modifications (mutations). It is also possible that data from two parents are introduced into an offspring entity (recombination). Among the parents and offsprings, the best entities are selected to become parents of the subsequent generation. The whole process starts with a population of randomly generated entities (or based on solutions obtained from earlier planning) and results in the best entity of the final population, the solution to the problem.

The developed EA controls the assignment of requests to vehicles and so each entity consists of an array of numbers specifying the vehicle assigned to each transport request. Mutations are performed by randomly assigning a new feasible vehicle to a request. Recombination is done by combining two different sets of assignments in some consistent way. To select best solutions, an entity needs some evaluation which means that specific vehicle routes are built by a given route construction scheme. The selection criterion is then the overall objective function introduced before. The EA is tuned by a number of parameters. In particular, a larger number of performed generations or a larger population size frequently improves the results but requires longer computation times. Since these parameters do not allow for a direct control of running times (which is essential in real-time planning where optimization runs are performed at regular time intervals), an additional parameter prescribes the maximum allowed runtime of the EA.

## **The Municipal Clinics Frankfurt am Main-Höchst**

The Municipal Clinics Frankfurt am Main-Höchst (MCFH) are a 1,000-bed facility in Germany (see Figure 6). MCFH provides health care to about 34,000 inpatients and performs approximately 20,000 surgeries each year.

The PTD has a staff of sixteen employees that are divided into three eight hour shifts. In addition, seven volunteers support the provision of transports as part of a replacement program for military service. However, the volunteers are not qualified to perform all duties. Since the buildings' basements are connected by a series of underground walkways, all transports are provided on foot. Some buildings are also connected above ground (e.g. A and B, A and K). In 2003, about 61,000 patient transports were conducted by the PTD. There was a general belief back then that the majority of these transports were not achieved in either a timely or effective way. Delays due to administrative requirements, unavailable resources, disruptions, lack of clarity in many procedures leading to confusion and misuse, and deficient communication were among the most cited causes.

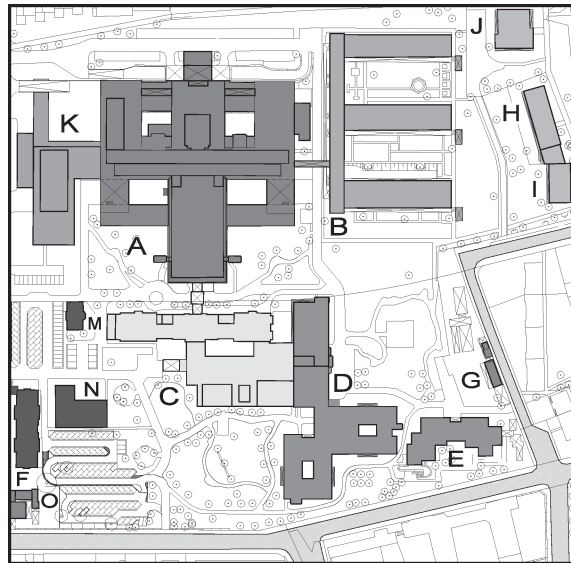


Figure 6: The MCFH campus: the main building (denoted by A) is a 14-story facility housing various diagnostic service areas (in the first three floors) and nursing wards. Buildings B through E accommodate several medical departments and nursing wards. Surgery and emergency services occupy building K. The remaining buildings support administrative and other daily operations.

In early 2004, the hospital approached us to review its present practices and give recommendations for potential changes to the patient transportation service in the hope of improving its performance and thus enhance patient satisfaction. We conducted extensive interviews and mapped both the patient flow and the transportation planning processes. At that time, the daily operation of the PTD relied on bookings made over the phone, paper based records, phone communication between dispatcher and transporters, manual assignment of requests to staff members, etc. Through intensive data collection and analysis we could gain a sufficient level of understanding of all processes and resources involved. Furthermore, we mapped the network of walkways used by PTD staff, calculated distances and estimated walking times depending on patient mobility. The collection and preparation of baseline data took place during the first half of 2005. Together with the logistics department we decided to split the deployment of Opti-TRANS<sup>®</sup> into two phases. The first phase started in the Fall 2005 with a few hospital units selected as pilot users to test the software without the optimization procedures. In order to increase acceptance, management felt that users needed to gradually become acquainted with the new system and in particular with the order entry module. By Spring 2006, all hospital

units were using Opti-TRANS<sup>©</sup> to book and monitor their requests for transportation. During this initial phase we refined and improved the GUI and the interface to the HIS. Moreover, we tailored the heuristic procedures and tested them with data generated according to the characteristics of a particularly busy period of the day. 60 transport requests were generated with earliest desired pickup times occurring within a one-hour interval. The requests were classified into three priority levels (high, normal, low) and included varying requirements for equipment and medical escort. At most 21 transporters were available, meaning that on average three requests could be serviced by each staff member during one hour. Figure 7 shows the results obtained by combining different strategies for assigning and scheduling requests. The solutions obtained were assessed by their quality (objective value) and computing time. Although we knew beforehand that some combinations would not yield good quality solutions, it was important to consider them since they were closer to the manual dispatching rules, and thus enabled the hospital to recognize the enhancement potential of the optimization methods. This is clearly the case of using the first fit strategy in the routing and scheduling stage. As expected, there is

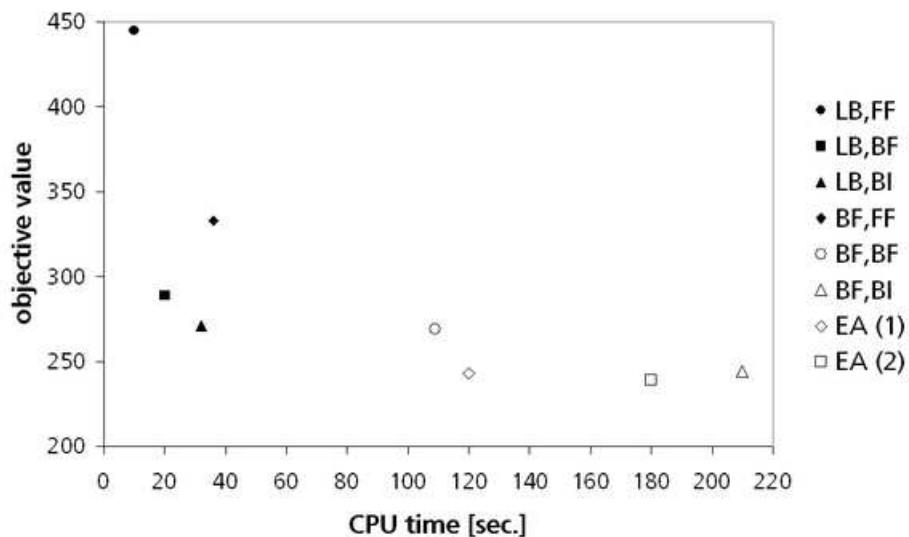


Figure 7: Comparison of different optimization strategies at MCFH. Each variant corresponds to a combination of a request assignment strategy and a routing/scheduling method. For example, “LB,FF” means that the load balancing (LB) scheme was employed to assign requests to vehicles and the first fit (FF) strategy was used to schedule the requests in the selected routes. Moreover, the EA was run under two different time limits: (1) 120 sec. and (2) 180 sec.

a trade-off between solution quality and running time. For peak demand periods it was decided to use load balancing combined with best insert. The EA, as expected, is better suited for low

demand periods.

The second deployment phase of Opti-*TRANS*® took place by mid 2006, and consisted in activating the optimization routines and the report generating tools. In the first few months following the full installation of the software, further refinement and tailoring activities were performed.

## **Organizational Benefits and Results**

MCFH started experiencing the benefits of using the software already during the first deployment phase. The new system helped streamline transportation processes and workflow. As a result, the organization and coordination of intra-hospital transports was greatly enhanced. Many procedures that lacked clarity were replaced by consistent rules. For example, on-line data entry, via the web-based booking system, completely transformed the order entry process and the information flow between the hospital units and the central dispatch office.

The optimization-based methods, which started being used in the second deployment phase, brought further benefits. However, it is difficult to measure the savings directly attributable to the heuristic procedures because hand-made solutions were never recorded and therefore, comparison of automated versus manual dispatching rules is not possible. Yet, both the PTD and the logistics department feel that significant savings have been achieved in terms of the quality of the new routes and schedules. As a result, service level was enhanced through the overall reduction of patient waiting times and at the same time, the workload became more evenly divided among PTD staff. Hence, Opti-*TRANS*® has contributed to improve patient satisfaction and to cut down hospital costs.

Furthermore, with the help of the new tool management realized that the workforce coverage in the afternoon was not enough to cope with demand, while a surplus was detected in the morning. This led to moving some PTD personnel from the morning to the afternoon shift. The reporting tools also showed that some diagnostic units ordered transports in batches. This procedure created sudden demand peaks for patient transports which could not be properly satisfied with the available resources. Although an increase of the PTD capacity seemed to be the right decision to take, we noticed that the problem had an organizational background. The service units were actually not sized to attend so many patients at the same time and therefore, a timely arrival of the patients at those units would simply yield intolerable waiting times. Hence, the problem was solved by reviewing the rules for appointment scheduling in

those hospital departments.

Currently, MCFH is focusing on enhancing the communication mode between the central dispatch office and the transporters. Ideally, PTD staff would carry mobile devices capable of maintaining full two-way data communication at any time instead of using in-house telephones. In addition, the exact location of each transporter could be known thus allowing the diversion of the transporter away from his immediate destination to service a new request in the vicinity of his current position. However, the hospital does not have enough financial resources at the moment to invest in a wireless local-area network infrastructure. In the meantime, alternative technological solutions are being sought. One possibility is to install access points in central locations within the hospital (e.g. elevator banks) that are visited during most of the transports.

Finally, the new planning system has played an important role in bringing more robustness not only to intra-hospital transports but also to patient flow management in general. MCFH has also recognized the role of the new system to support strategic planning. In the long-run, the tool helps to obtain a better insight into the main transport paths within the hospital. This knowledge is important for layout planning, where the location and size of new medical and nursing units is to be decided so as to minimize the total distance that patients and staff must walk. MCFH is currently conducting a study on the future layout of the hospital to respond to population aging and growing demand for ambulatory medical care.

## **Conclusions**

Intra-hospital transportation is an essential building block for increasing efficiency in hospital logistics. This conclusion is supported by the results obtained not only at MCFH but also at other large German hospitals where we conducted similar projects. The growing patient-oriented view in German health care organizations reinforces the importance of providing efficient and timely transport service to patients. In addition, the continuing pressure on hospitals to cut down costs also drives the development of planning systems to support decision making processes.

Although the health care industry in Germany has been relatively slow in adopting information technology and operations research techniques, this study reveals that there is a significant potential for using these tools. We have shown that optimization-based methods can give a major contribution to enhancing patient satisfaction and at the same time generating important cost savings. However, operations research methods alone are not sufficient to resolve all the flaws in the transport system. Improvements can only be achieved by streamlining work



processes and increasing awareness among hospital staff about the importance of implementing efficient logistics practices, Hall et al. (2006). Opti-TRANS<sup>©</sup> is a transport planning system that has been designed to support all phases of the transportation flow, ranging from request booking, scheduling, dispatching to monitoring and reporting. Finally, we point out that although the interrelation between patient transportation (and more generally hospital logistics) and clinical pathways is evident, it has not yet been fully investigated.

## Appendix

The DARP is concerned with finding a set of minimum-cost routes and schedules for a given fleet of vehicles to transport passengers between specific origins and destinations at the request of users, Cordeau and Laporte (2007). The patient transportation problem is a DARP with several complicating constraints that are specific to a hospital context. Instead of presenting a formal mathematical formulation of the problem, we rather give a verbal description of the constraints that must be satisfied by any feasible solution. Our choice is motivated by the computational intractability of the problem (the DARP is a well-known  $\mathcal{NP}$ -hard problem) so that a formal mixed integer linear programming model does not provide useful insights into the structure of good feasible solutions. The interested reader is referred to Cordeau (2006) and Cordeau and Laporte (2007) for formulations of the DARP, and to Kallrath (2005) for a mathematical model for the Saarland University Hospital.

The objective function to be minimized is a weighted sum of four objectives measuring hospital costs and patient inconvenience as described before. The constraints can be grouped as follows:

- (i) Visiting constraints: the pickup and delivery locations of a request are visited once;
- (ii) Depot constraints: the route of each vehicle starts and ends at the corresponding depot(s);
- (iii) Capacity constraints: the disjunctive multi-dimensional capacities of each vehicle cannot be exceeded; no more pieces of equipment than those available in each vehicle can be used;
- (iv) Pairing constraints: the pickup and delivery locations of each request must be visited by the same vehicle;
- (v) Precedence constraints: each patient must be picked up before being dropped off;

- (vi) Patient inconvenience constraints: the time elapsed between the pickup and delivery of a patient cannot exceed a pre-specified maximum ride time;
- (vii) Resource constraints: the service periods of the vehicles and the staff rosters must be respected; deviations from the desired begin of rest periods cannot exceed a given tolerance;
- (viii) Hospital service constraints: requests for single transportation (e.g. for patients on isolation) must be fulfilled; a transport booking requiring nursing or medical assistance is to be handled as a *chain of requests* that cannot be interrupted by servicing other requests (e.g. the following sequence is to be performed by a vehicle: *pickup doctor - pickup patient - deliver patient - deliver doctor*).

## Acknowledgments

The authors wish to thank all those at the Municipal Clinics Frankfurt am Main-Höchst who contributed to this project. In particular, we thank Mr. K. Pilgram for investing his time and providing technical expertise and valuable support throughout the project.

## References

- Aldaihani, M., M. Dessouky. 2003. Hybrid scheduling methods for paratransit operations. *Computers & Industrial Engineering* **45** 75–96.
- Attanasio, A., J.-F. Cordeau, G. Ghiani, G. Laporte. 2004. Parallel tabu search heuristics for the dynamic multi-vehicle dial-a-ride problem. *Parallel Computing* **30** 377–387.
- Baugh, J., G. Krishna, R. Kakivaya, J. Stone. 1998. Intractability of the dial-a-ride problem and a multiobjective solution using simulated annealing. *Engineering Optimization* **30** 91–123.
- Beaudry, A., G. Laporte, T. Melo, S. Nickel. 2006. Dynamic transportation of patients in hospitals. Tech. Rep. CRT-2006-29, Centre de Recherche sur les Transports, Université de Montréal, Canada. (submitted for publication).
- Cordeau, J.-F. 2006. A branch-and-cut algorithm for the dial-a-ride problem. *Operations Research* **54** 573–586.

- Cordeau, J.-F., G. Laporte. 2003. A tabu search heuristic for the static multi-vehicle dial-a-ride problem. *Transportation Research Part B* **37** 579–594.
- Cordeau, J.-F., G. Laporte. 2007. The dial-a-ride problem: models and algorithms. *Annals of Operations Research* **153** 29–46.
- Cordeau, J.-F., G. Laporte, J.-Y. Potvin, M.W.P. Savelsbergh. 2006. Transportation on demand. C. Barnhart, G. Laporte, eds., *Transportation, Handbooks in Operations Research and Management Science*, vol. 14, chap. 7. North Holland, 429–466.
- Hall, R., D. Belson, P. Murali, M. Dessouky. 2006. Modeling patient flows through the health-care system. R.W. Hall, ed., *Patient Flow: Reducing Delay in Healthcare Delivery, International Series In Operations Research & Management Science*, vol. 91. Springer, 1–44.
- Jacobson, S.H., S.N. Hall, J.R. Swisher. 2006. Discrete-event simulation of health care systems. R.W. Hall, ed., *Patient Flow: Reducing Delay in Healthcare Delivery, International Series In Operations Research & Management Science*, vol. 91. Springer, 211–252.
- Jørgensen, R., J. Larsen, K.B. Bergvinsdottir. 2007. Solving the dial-a-ride problem using genetic algorithms. *Journal of the Operational Research Society*, **58** 1321–1331.
- Kallrath, J. 2005. Vehicle routing problems in hospitals I. *Online Storage Systems and Transportation Problems with Applications: Optimization Models and Mathematical Solutions, Applied Optimization*, vol. 91, chap. 4. Springer, 57–120.
- Landry, S., R. Philippe. 2004. How logistics can service healthcare. *Supply Chain Forum* **5** 24–30.
- Melachrinoudis, E., A. Ilhan, H. Min. 2007. A dial-a-ride problem for client transportation in a health-care organization. *Computers & Operations Research* **34** 742–759.
- Paquette, J., J.-F. Cordeau, G. Laporte. 2007. Quality of service in dial-a-ride operations. Technical report, CIRRELT, École des Hautes Études Commerciales, Montréal, Canada. Available online at <http://neumann.hec.ca/chairedistributique/common/Quality.pdf>.
- Toth, P., D. Vigo. 1997. Heuristic algorithms for the handicapped persons transportation problem. *Transportation Science* **31** 60–71.

# Published reports of the Fraunhofer ITWM

The PDF-files of the following reports are available under:

[www.itwm.fraunhofer.de/de/zentral\\_\\_berichte/berichte](http://www.itwm.fraunhofer.de/de/zentral__berichte/berichte)

1. D. Hietel, K. Steiner, J. Struckmeier  
**A Finite - Volume Particle Method for Compressible Flows**  
(19 pages, 1998)
2. M. Feldmann, S. Seibold  
**Damage Diagnosis of Rotors: Application of Hilbert Transform and Multi-Hypothesis Testing**  
Keywords: Hilbert transform, damage diagnosis, Kalman filtering, non-linear dynamics  
(23 pages, 1998)
3. Y. Ben-Haim, S. Seibold  
**Robust Reliability of Diagnostic Multi-Hypothesis Algorithms: Application to Rotating Machinery**  
Keywords: Robust reliability, convex models, Kalman filtering, multi-hypothesis diagnosis, rotating machinery, crack diagnosis  
(24 pages, 1998)
4. F.-Th. Lentens, N. Siedow  
**Three-dimensional Radiative Heat Transfer in Glass Cooling Processes**  
(23 pages, 1998)
5. A. Klar, R. Wegener  
**A hierarchy of models for multilane vehicular traffic**  
**Part I: Modeling**  
(23 pages, 1998)  
**Part II: Numerical and stochastic investigations**  
(17 pages, 1998)
6. A. Klar, N. Siedow  
**Boundary Layers and Domain Decomposition for Radiative Heat Transfer and Diffusion Equations: Applications to Glass Manufacturing Processes**  
(24 pages, 1998)
7. I. Choquet  
**Heterogeneous catalysis modelling and numerical simulation in rarified gas flows**  
**Part I: Coverage locally at equilibrium**  
(24 pages, 1998)
8. J. Ohser, B. Steinbach, C. Lang  
**Efficient Texture Analysis of Binary Images**  
(17 pages, 1998)
9. J. Orlik  
**Homogenization for viscoelasticity of the integral type with aging and shrinkage**  
(20 pages, 1998)
10. J. Mohring  
**Helmholtz Resonators with Large Aperture**  
(21 pages, 1998)
11. H. W. Hamacher, A. Schöbel  
**On Center Cycles in Grid Graphs**  
(15 pages, 1998)
12. H. W. Hamacher, K.-H. Küfer  
**Inverse radiation therapy planning - a multiple objective optimisation approach**  
(14 pages, 1999)
13. C. Lang, J. Ohser, R. Hilfer  
**On the Analysis of Spatial Binary Images**  
(20 pages, 1999)
14. M. Junk  
**On the Construction of Discrete Equilibrium Distributions for Kinetic Schemes**  
(24 pages, 1999)
15. M. Junk, S. V. Raghurame Rao  
**A new discrete velocity method for Navier-Stokes equations**  
(20 pages, 1999)
16. H. Neunzert  
**Mathematics as a Key to Key Technologies**  
(39 pages (4 PDF-Files), 1999)
17. J. Ohser, K. Sandau  
**Considerations about the Estimation of the Size Distribution in Wicksell's Corpuscle Problem**  
(18 pages, 1999)
18. E. Carrizosa, H. W. Hamacher, R. Klein, S. Nickel  
**Solving nonconvex planar location problems by finite dominating sets**  
Keywords: Continuous Location, Polyhedral Gauges, Finite Dominating Sets, Approximation, Sandwich Algorithm, Greedy Algorithm  
(19 pages, 2000)
19. A. Becker  
**A Review on Image Distortion Measures**  
Keywords: Distortion measure, human visual system  
(26 pages, 2000)
20. H. W. Hamacher, M. Labbé, S. Nickel, T. Sonneborn  
**Polyhedral Properties of the Uncapacitated Multiple Allocation Hub Location Problem**  
Keywords: integer programming, hub location, facility location, valid inequalities, facets, branch and cut  
(21 pages, 2000)
21. H. W. Hamacher, A. Schöbel  
**Design of Zone Tariff Systems in Public Transportation**  
(30 pages, 2001)
22. D. Hietel, M. Junk, R. Keck, D. Teleaga  
**The Finite-Volume-Particle Method for Conservation Laws**  
(16 pages, 2001)
23. T. Bender, H. Hennes, J. Kalcsics, M. T. Melo, S. Nickel  
**Location Software and Interface with GIS and Supply Chain Management**  
Keywords: facility location, software development, geographical information systems, supply chain management  
(48 pages, 2001)
24. H. W. Hamacher, S. A. Tjandra  
**Mathematical Modelling of Evacuation Problems: A State of Art**  
(44 pages, 2001)
25. J. Kuhnert, S. Tiwari  
**Grid free method for solving the Poisson equation**  
Keywords: Poisson equation, Least squares method, Grid free method  
(19 pages, 2001)
26. T. Götz, H. Rave, D. Reinel-Bitzer, K. Steiner, H. Tiemeier  
**Simulation of the fiber spinning process**  
Keywords: Melt spinning, fiber model, Lattice Boltzmann, CFD  
(19 pages, 2001)
27. A. Zemitis  
**On interaction of a liquid film with an obstacle**  
Keywords: impinging jets, liquid film, models, numerical solution, shape  
(22 pages, 2001)
28. I. Ginzburg, K. Steiner  
**Free surface lattice-Boltzmann method to model the filling of expanding cavities by Bingham Fluids**  
Keywords: Generalized LBE, free-surface phenomena, interface boundary conditions, filling processes, Bingham viscoplastic model, regularized models  
(22 pages, 2001)
29. H. Neunzert  
**»Denn nichts ist für den Menschen als Menschen etwas wert, was er nicht mit Leidenschaft tun kann«**  
**Vortrag anlässlich der Verleihung des Akademiepreises des Landes Rheinland-Pfalz am 21.11.2001**  
Keywords: Lehre, Forschung, angewandte Mathematik, Mehrrskalalanalyse, Strömungsmechanik  
(18 pages, 2001)
30. J. Kuhnert, S. Tiwari  
**Finite pointset method based on the projection method for simulations of the incompressible Navier-Stokes equations**  
Keywords: Incompressible Navier-Stokes equations, Meshfree method, Projection method, Particle scheme, Least squares approximation  
AMS subject classification: 76D05, 76M28  
(25 pages, 2001)
31. R. Korn, M. Krekel  
**Optimal Portfolios with Fixed Consumption or Income Streams**  
Keywords: Portfolio optimisation, stochastic control, HJB equation, discretisation of control problems  
(23 pages, 2002)
32. M. Krekel  
**Optimal portfolios with a loan dependent credit spread**  
Keywords: Portfolio optimisation, stochastic control, HJB equation, credit spread, log utility, power utility, non-linear wealth dynamics  
(25 pages, 2002)
33. J. Ohser, W. Nagel, K. Schladitz  
**The Euler number of discretized sets – on the choice of adjacency in homogeneous lattices**  
Keywords: image analysis, Euler number, neighborhood relationships, cuboidal lattice  
(32 pages, 2002)

34. I. Ginzburg, K. Steiner  
**Lattice Boltzmann Model for Free-Surface flow and Its Application to Filling Process in Casting**  
Keywords: Lattice Boltzmann models; free-surface phenomena; interface boundary conditions; filling processes; injection molding; volume of fluid method; interface boundary conditions; advection-schemes; up-wind-schemes (54 pages, 2002)
35. M. Günther, A. Klar, T. Materne, R. Wegener  
**Multivalued fundamental diagrams and stop and go waves for continuum traffic equations**  
Keywords: traffic flow, macroscopic equations, kinetic derivation, multivalued fundamental diagram, stop and go waves, phase transitions (25 pages, 2002)
36. S. Feldmann, P. Lang, D. Prätzel-Wolters  
**Parameter influence on the zeros of network determinants**  
Keywords: Networks, Equicofactor matrix polynomials, Realization theory, Matrix perturbation theory (30 pages, 2002)
37. K. Koch, J. Ohser, K. Schladitz  
**Spectral theory for random closed sets and estimating the covariance via frequency space**  
Keywords: Random set, Bartlett spectrum, fast Fourier transform, power spectrum (28 pages, 2002)
38. D. d'Humières, I. Ginzburg  
**Multi-reflection boundary conditions for lattice Boltzmann models**  
Keywords: lattice Boltzmann equation, boundary conditions, bounce-back rule, Navier-Stokes equation (72 pages, 2002)
39. R. Korn  
**Elementare Finanzmathematik**  
Keywords: Finanzmathematik, Aktien, Optionen, Portfolio-Optimierung, Börse, Lehrerweiterbildung, Mathematikunterricht (98 pages, 2002)
40. J. Kallrath, M. C. Müller, S. Nickel  
**Batch Presorting Problems: Models and Complexity Results**  
Keywords: Complexity theory, Integer programming, Assignment, Logistics (19 pages, 2002)
41. J. Linn  
**On the frame-invariant description of the phase space of the Folgar-Tucker equation**  
Key words: fiber orientation, Folgar-Tucker equation, injection molding (5 pages, 2003)
42. T. Hanne, S. Nickel  
**A Multi-Objective Evolutionary Algorithm for Scheduling and Inspection Planning in Software Development Projects**  
Key words: multiple objective programming, project management and scheduling, software development, evolutionary algorithms, efficient set (29 pages, 2003)
43. T. Bortfeld, K.-H. Küfer, M. Monz, A. Scherrer, C. Thieke, H. Trinkaus  
**Intensity-Modulated Radiotherapy - A Large Scale Multi-Criteria Programming Problem**  
Keywords: multiple criteria optimization, representative systems of Pareto solutions, adaptive triangulation, clustering and disaggregation techniques, visualization of Pareto solutions, medical physics, external beam radiotherapy planning, intensity modulated radiotherapy (31 pages, 2003)
44. T. Halfmann, T. Wichmann  
**Overview of Symbolic Methods in Industrial Analog Circuit Design**  
Keywords: CAD, automated analog circuit design, symbolic analysis, computer algebra, behavioral modeling, system simulation, circuit sizing, macro modeling, differential-algebraic equations, index (17 pages, 2003)
45. S. E. Mikhailov, J. Orlik  
**Asymptotic Homogenisation in Strength and Fatigue Durability Analysis of Composites**  
Keywords: multiscale structures, asymptotic homogenization, strength, fatigue, singularity, non-local conditions (14 pages, 2003)
46. P. Domínguez-Marín, P. Hansen, N. Mladenović, S. Nickel  
**Heuristic Procedures for Solving the Discrete Ordered Median Problem**  
Keywords: genetic algorithms, variable neighborhood search, discrete facility location (31 pages, 2003)
47. N. Boland, P. Domínguez-Marín, S. Nickel, J. Puerto  
**Exact Procedures for Solving the Discrete Ordered Median Problem**  
Keywords: discrete location, Integer programming (41 pages, 2003)
48. S. Feldmann, P. Lang  
**Padé-like reduction of stable discrete linear systems preserving their stability**  
Keywords: Discrete linear systems, model reduction, stability, Hankel matrix, Stein equation (16 pages, 2003)
49. J. Kallrath, S. Nickel  
**A Polynomial Case of the Batch Presorting Problem**  
Keywords: batch presorting problem, online optimization, competitive analysis, polynomial algorithms, logistics (17 pages, 2003)
50. T. Hanne, H. L. Trinkaus  
**knowCube for MCDM – Visual and Interactive Support for Multicriteria Decision Making**  
Key words: Multicriteria decision making, knowledge management, decision support systems, visual interfaces, interactive navigation, real-life applications. (26 pages, 2003)
51. O. Iliev, V. Laptev  
**On Numerical Simulation of Flow Through Oil Filters**  
Keywords: oil filters, coupled flow in plain and porous media, Navier-Stokes, Brinkman, numerical simulation (8 pages, 2003)
52. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva  
**On a Multigrid Adaptive Refinement Solver for Saturated Non-Newtonian Flow in Porous Media**  
Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian flow in porous media (17 pages, 2003)
53. S. Kruse  
**On the Pricing of Forward Starting Options under Stochastic Volatility**  
Keywords: Option pricing, forward starting options, Heston model, stochastic volatility, cliquet options (11 pages, 2003)
54. O. Iliev, D. Stoyanov  
**Multigrid – adaptive local refinement solver for incompressible flows**  
Keywords: Navier-Stokes equations, incompressible flow, projection-type splitting, SIMPLE, multigrid methods, adaptive local refinement, lid-driven flow in a cavity (37 pages, 2003)
55. V. Starikovicus  
**The multiphase flow and heat transfer in porous media**  
Keywords: Two-phase flow in porous media, various formulations, global pressure, multiphase mixture model, numerical simulation (30 pages, 2003)
56. P. Lang, A. Sarishvili, A. Wirsen  
**Blocked neural networks for knowledge extraction in the software development process**  
Keywords: Blocked Neural Networks, Nonlinear Regression, Knowledge Extraction, Code Inspection (21 pages, 2003)
57. H. Knaf, P. Lang, S. Zeiser  
**Diagnosis aiding in Regulation Thermography using Fuzzy Logic**  
Keywords: fuzzy logic, knowledge representation, expert system (22 pages, 2003)
58. M. T. Melo, S. Nickel, F. Saldanha da Gama  
**Largescale models for dynamic multi-commodity capacitated facility location**  
Keywords: supply chain management, strategic planning, dynamic location, modeling (40 pages, 2003)
59. J. Orlik  
**Homogenization for contact problems with periodically rough surfaces**  
Keywords: asymptotic homogenization, contact problems (28 pages, 2004)
60. A. Scherrer, K.-H. Küfer, M. Monz, F. Alonso, T. Bortfeld  
**IMRT planning on adaptive volume structures – a significant advance of computational complexity**  
Keywords: Intensity-modulated radiation therapy (IMRT), inverse treatment planning, adaptive volume structures, hierarchical clustering, local refinement, adaptive clustering, convex programming, mesh generation, multi-grid methods (24 pages, 2004)
61. D. Kehrwald  
**Parallel lattice Boltzmann simulation of complex flows**  
Keywords: Lattice Boltzmann methods, parallel computing, microstructure simulation, virtual material design, pseudo-plastic fluids, liquid composite moulding (12 pages, 2004)
62. O. Iliev, J. Linn, M. Moog, D. Niedziela, V. Starikovicus  
**On the Performance of Certain Iterative Solvers for Coupled Systems Arising in Discretization of Non-Newtonian Flow Equations**  
Keywords: Performance of iterative solvers, Preconditioners, Non-Newtonian flow (17 pages, 2004)
63. R. Ciegis, O. Iliev, S. Rief, K. Steiner  
**On Modelling and Simulation of Different Regimes for Liquid Polymer Moulding**  
Keywords: Liquid Polymer Moulding, Modelling, Simulation, Infiltration, Front Propagation, non-Newtonian flow in porous media (43 pages, 2004)

64. T. Hanne, H. Neu  
**Simulating Human Resources in Software Development Processes**  
Keywords: Human resource modeling, software process, productivity, human factors, learning curve (14 pages, 2004)
65. O. Iliev, A. Mikelic, P. Popov  
**Fluid structure interaction problems in deformable porous media: Toward permeability of deformable porous media**  
Keywords: fluid-structure interaction, deformable porous media, upscaling, linear elasticity, stokes, finite elements (28 pages, 2004)
66. F. Gaspar, O. Iliev, F. Lisbona, A. Naumovich, P. Vabishchevich  
**On numerical solution of 1-D poroelasticity equations in a multilayered domain**  
Keywords: poroelasticity, multilayered material, finite volume discretization, MAC type grid (41 pages, 2004)
67. J. Ohser, K. Schladitz, K. Koch, M. Nöthe  
**Diffraction by image processing and its application in materials science**  
Keywords: porous microstructure, image analysis, random set, fast Fourier transform, power spectrum, Bartlett spectrum (13 pages, 2004)
68. H. Neunzert  
**Mathematics as a Technology: Challenges for the next 10 Years**  
Keywords: applied mathematics, technology, modelling, simulation, visualization, optimization, glass processing, spinning processes, fiber-fluid interaction, turbulence effects, topological optimization, multicriteria optimization, Uncertainty and Risk, financial mathematics, Malliavin calculus, Monte-Carlo methods, virtual material design, filtration, bio-informatics, system biology (29 pages, 2004)
69. R. Ewing, O. Iliev, R. Lazarov, A. Naumovich  
**On convergence of certain finite difference discretizations for 1D poroelasticity interface problems**  
Keywords: poroelasticity, multilayered material, finite volume discretizations, MAC type grid, error estimates (26 pages, 2004)
70. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva  
**On Efficient Simulation of Non-Newtonian Flow in Saturated Porous Media with a Multigrid Adaptive Refinement Solver**  
Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian in porous media (25 pages, 2004)
71. J. Kalcsics, S. Nickel, M. Schröder  
**Towards a Unified Territory Design Approach – Applications, Algorithms and GIS Integration**  
Keywords: territory design, political districting, sales territory alignment, optimization algorithms, Geographical Information Systems (40 pages, 2005)
72. K. Schladitz, S. Peters, D. Reinel-Bitzer, A. Wiegmann, J. Ohser  
**Design of acoustic trim based on geometric modeling and flow simulation for non-woven**  
Keywords: random system of fibers, Poisson line process, flow resistivity, acoustic absorption, Lattice-Boltzmann method, non-woven (21 pages, 2005)
73. V. Rutka, A. Wiegmann  
**Explicit Jump Immersed Interface Method for virtual material design of the effective elastic moduli of composite materials**  
Keywords: virtual material design, explicit jump immersed interface method, effective elastic moduli, composite materials (22 pages, 2005)
74. T. Hanne  
**Eine Übersicht zum Scheduling von Baustellen**  
Keywords: Projektplanung, Scheduling, Bauplanung, Bauindustrie (32 pages, 2005)
75. J. Linn  
**The Folgar-Tucker Model as a Differential Algebraic System for Fiber Orientation Calculation**  
Keywords: fiber orientation, Folgar-Tucker model, invariants, algebraic constraints, phase space, trace stability (15 pages, 2005)
76. M. Speckert, K. Dreßler, H. Mauch, A. Lion, G. J. Wierda  
**Simulation eines neuartigen Prüfsystems für Achserprobungen durch MKS-Modellierung einschließlich Regelung**  
Keywords: virtual test rig, suspension testing, multibody simulation, modeling hexapod test rig, optimization of test rig configuration (20 pages, 2005)
77. K.-H. Küfer, M. Monz, A. Scherrer, P. Süß, F. Alonso, A. S. A. Sultan, Th. Bortfeld, D. Craft, Chr. Thieke  
**Multicriteria optimization in intensity modulated radiotherapy planning**  
Keywords: multicriteria optimization, extreme solutions, real-time decision making, adaptive approximation schemes, clustering methods, IMRT planning, reverse engineering (51 pages, 2005)
78. S. Amstutz, H. Andrä  
**A new algorithm for topology optimization using a level-set method**  
Keywords: shape optimization, topology optimization, topological sensitivity, level-set (22 pages, 2005)
79. N. Ettrich  
**Generation of surface elevation models for urban drainage simulation**  
Keywords: Flooding, simulation, urban elevation models, laser scanning (22 pages, 2005)
80. H. Andrä, J. Linn, I. Matej, I. Shklyar, K. Steiner, E. Teichmann  
**OPTCAST – Entwicklung adäquater Strukturoptimierungsverfahren für Gießereien Technischer Bericht (KURZFASSUNG)**  
Keywords: Topologieoptimierung, Level-Set-Methode, Gießprozesssimulation, Gießtechnische Restriktionen, CAE-Kette zur Strukturoptimierung (77 pages, 2005)
81. N. Marheineke, R. Wegener  
**Fiber Dynamics in Turbulent Flows Part I: General Modeling Framework**  
Keywords: fiber-fluid interaction; Cosserat rod; turbulence modeling; Kolmogorov's energy spectrum; double-velocity correlations; differentiable Gaussian fields (20 pages, 2005)
- Part II: Specific Taylor Drag**  
Keywords: flexible fibers;  $k-\epsilon$  turbulence model; fiber-turbulence interaction scales; air drag; random Gaussian aerodynamic force; white noise; stochastic differential equations; ARMA process (18 pages, 2005)
82. C. H. Lampert, O. Wirjadi  
**An Optimal Non-Orthogonal Separation of the Anisotropic Gaussian Convolution Filter**  
Keywords: Anisotropic Gaussian filter, linear filtering, orientation space, nD image processing, separable filters (25 pages, 2005)
83. H. Andrä, D. Stoyanov  
**Error indicators in the parallel finite element solver for linear elasticity DDFEM**  
Keywords: linear elasticity, finite element method, hierarchical shape functions, domain decomposition, parallel implementation, a posteriori error estimates (21 pages, 2006)
84. M. Schröder, I. Solchenbach  
**Optimization of Transfer Quality in Regional Public Transit**  
Keywords: public transit, transfer quality, quadratic assignment problem (16 pages, 2006)
85. A. Naumovich, F. J. Gaspar  
**On a multigrid solver for the three-dimensional Biot poroelasticity system in multilayered domains**  
Keywords: poroelasticity, interface problem, multigrid, operator-dependent prolongation (11 pages, 2006)
86. S. Panda, R. Wegener, N. Marheineke  
**Slender Body Theory for the Dynamics of Curved Viscous Fibers**  
Keywords: curved viscous fibers; fluid dynamics; Navier-Stokes equations; free boundary value problem; asymptotic expansions; slender body theory (14 pages, 2006)
87. E. Ivanov, H. Andrä, A. Kudryavtsev  
**Domain Decomposition Approach for Automatic Parallel Generation of Tetrahedral Grids**  
Key words: Grid Generation, Unstructured Grid, Delaunay Triangulation, Parallel Programming, Domain Decomposition, Load Balancing (18 pages, 2006)
88. S. Tiwari, S. Antonov, D. Hietel, J. Kuhnert, R. Wegener  
**A Meshfree Method for Simulations of Interactions between Fluids and Flexible Structures**  
Key words: Meshfree Method, FPM, Fluid Structure Interaction, Sheet of Paper, Dynamical Coupling (16 pages, 2006)
89. R. Ciegis, O. Iliev, V. Starikovicius, K. Steiner  
**Numerical Algorithms for Solving Problems of Multiphase Flows in Porous Media**  
Keywords: nonlinear algorithms, finite-volume method, software tools, porous media, flows (16 pages, 2006)
90. D. Niedziela, O. Iliev, A. Latz  
**On 3D Numerical Simulations of Viscoelastic Fluids**  
Keywords: non-Newtonian fluids, anisotropic viscosity, integral constitutive equation (18 pages, 2006)

91. A. Winterfeld  
**Application of general semi-infinite Programming to Lapidary Cutting Problems**  
Keywords: large scale optimization, nonlinear programming, general semi-infinite optimization, design centering, clustering  
(26 pages, 2006)
92. J. Orlik, A. Ostrovska  
**Space-Time Finite Element Approximation and Numerical Solution of Hereditary Linear Viscoelasticity Problems**  
Keywords: hereditary viscoelasticity; kern approximation by interpolation; space-time finite element approximation, stability and a priori estimate  
(24 pages, 2006)
93. V. Rutka, A. Wiegmann, H. Andrä  
**EJIM for Calculation of effective Elastic Moduli in 3D Linear Elasticity**  
Keywords: Elliptic PDE, linear elasticity, irregular domain, finite differences, fast solvers, effective elastic moduli  
(24 pages, 2006)
94. A. Wiegmann, A. Zemitis  
**EJ-HEAT: A Fast Explicit Jump Harmonic Averaging Solver for the Effective Heat Conductivity of Composite Materials**  
Keywords: Stationary heat equation, effective thermal conductivity, explicit jump, discontinuous coefficients, virtual material design, microstructure simulation, EJ-HEAT  
(21 pages, 2006)
95. A. Naumovich  
**On a finite volume discretization of the three-dimensional Biot poroelasticity system in multilayered domains**  
Keywords: Biot poroelasticity system, interface problems, finite volume discretization, finite difference method  
(21 pages, 2006)
96. M. Krekel, J. Wenzel  
**A unified approach to Credit Default Swap-tion and Constant Maturity Credit Default Swap valuation**  
Keywords: LIBOR market model, credit risk, Credit Default Swaption, Constant Maturity Credit Default Swap-method  
(43 pages, 2006)
97. A. Dreyer  
**Interval Methods for Analog Circuits**  
Keywords: interval arithmetic, analog circuits, tolerance analysis, parametric linear systems, frequency response, symbolic analysis, CAD, computer algebra  
(36 pages, 2006)
98. N. Weigel, S. Weihe, G. Bitsch, K. Dreßler  
**Usage of Simulation for Design and Optimization of Testing**  
Keywords: Vehicle test rigs, MBS, control, hydraulics, testing philosophy  
(14 pages, 2006)
99. H. Lang, G. Bitsch, K. Dreßler, M. Speckert  
**Comparison of the solutions of the elastic and elastoplastic boundary value problems**  
Keywords: Elastic BVP, elastoplastic BVP, variational inequalities, rate-independency, hysteresis, linear kinematic hardening, stop- and play-operator  
(21 pages, 2006)
100. M. Speckert, K. Dreßler, H. Mauch  
**MBS Simulation of a hexapod based suspension test rig**  
Keywords: Test rig, MBS simulation, suspension, hydraulics, controlling, design optimization  
(12 pages, 2006)
101. S. Azizi Sultan, K.-H. Küfer  
**A dynamic algorithm for beam orientations in multicriteria IMRT planning**  
Keywords: radiotherapy planning, beam orientation optimization, dynamic approach, evolutionary algorithm, global optimization  
(14 pages, 2006)
102. T. Götz, A. Klar, N. Marheineke, R. Wegener  
**A Stochastic Model for the Fiber Lay-down Process in the Nonwoven Production**  
Keywords: fiber dynamics, stochastic Hamiltonian system, stochastic averaging  
(17 pages, 2006)
103. Ph. Süß, K.-H. Küfer  
**Balancing control and simplicity: a variable aggregation method in intensity modulated radiation therapy planning**  
Keywords: IMRT planning, variable aggregation, clustering methods  
(22 pages, 2006)
104. A. Beaudry, G. Laporte, T. Melo, S. Nickel  
**Dynamic transportation of patients in hospitals**  
Keywords: in-house hospital transportation, dial-a-ride, dynamic mode, tabu search  
(37 pages, 2006)
105. Th. Hanne  
**Applying multiobjective evolutionary algorithms in industrial projects**  
Keywords: multiobjective evolutionary algorithms, discrete optimization, continuous optimization, electronic circuit design, semi-infinite programming, scheduling  
(18 pages, 2006)
106. J. Franke, S. Halim  
**Wild bootstrap tests for comparing signals and images**  
Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression  
(13 pages, 2007)
107. Z. Drezner, S. Nickel  
**Solving the ordered one-median problem in the plane**  
Keywords: planar location, global optimization, ordered median, big triangle small triangle method, bounds, numerical experiments  
(21 pages, 2007)
108. Th. Götz, A. Klar, A. Unterreiter, R. Wegener  
**Numerical evidence for the non-existing of solutions of the equations describing rotational fiber spinning**  
Keywords: rotational fiber spinning, viscous fibers, boundary value problem, existence of solutions  
(11 pages, 2007)
109. Ph. Süß, K.-H. Küfer  
**Smooth intensity maps and the Bortfeld-Boyer sequencer**  
Keywords: probabilistic analysis, intensity modulated radiotherapy treatment (IMRT), IMRT plan application, step-and-shoot sequencing  
(8 pages, 2007)
110. E. Ivanov, O. Gluchshenko, H. Andrä, A. Kudryavtsev  
**Parallel software tool for decomposing and meshing of 3d structures**  
Keywords: a-priori domain decomposition, unstructured grid, Delaunay mesh generation  
(14 pages, 2007)
111. O. Iliev, R. Lazarov, J. Willems  
**Numerical study of two-grid preconditioners for 1d elliptic problems with highly oscillating discontinuous coefficients**  
Keywords: two-grid algorithm, oscillating coefficients, preconditioner  
(20 pages, 2007)
112. L. Bonilla, T. Götz, A. Klar, N. Marheineke, R. Wegener  
**Hydrodynamic limit of the Fokker-Planck equation describing fiber lay-down processes**  
Keywords: stochastic differential equations, Fokker-Planck equation, asymptotic expansion, Ornstein-Uhlenbeck process  
(17 pages, 2007)
113. S. Rief  
**Modeling and simulation of the pressing section of a paper machine**  
Keywords: paper machine, computational fluid dynamics, porous media  
(41 pages, 2007)
114. R. Ciegis, O. Iliev, Z. Lakdawala  
**On parallel numerical algorithms for simulating industrial filtration problems**  
Keywords: Navier-Stokes-Brinkmann equations, finite volume discretization method, SIMPLE, parallel computing, data decomposition method  
(24 pages, 2007)
115. N. Marheineke, R. Wegener  
**Dynamics of curved viscous fibers with surface tension**  
Keywords: Slender body theory, curved viscous bers with surface tension, free boundary value problem  
(25 pages, 2007)
116. S. Feth, J. Franke, M. Speckert  
**Resampling-Methoden zur mse-Korrektur und Anwendungen in der Betriebsfestigkeit**  
Keywords: Weibull, Bootstrap, Maximum-Likelihood, Betriebsfestigkeit  
(16 pages, 2007)
117. H. Knaf  
**Kernel Fisher discriminant functions – a concise and rigorous introduction**  
Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression  
(30 pages, 2007)
118. O. Iliev, I. Rybak  
**On numerical upscaling for flows in heterogeneous porous media**  
Keywords: numerical upscaling, heterogeneous porous media, single phase flow, Darcy's law, multiscale problem, effective permeability, multipoint flux approximation, anisotropy  
(17 pages, 2007)
119. O. Iliev, I. Rybak  
**On approximation property of multipoint flux approximation method**  
Keywords: Multipoint flux approximation, finite volume method, elliptic equation, discontinuous tensor coefficients, anisotropy  
(15 pages, 2007)
120. O. Iliev, I. Rybak, J. Willems  
**On upscaling heat conductivity for a class of industrial problems**  
Keywords: Multiscale problems, effective heat conductivity, numerical upscaling, domain decomposition  
(21 pages, 2007)

121. R. Ewing, O. Iliev, R. Lazarov, I. Rybak  
**On two-level preconditioners for flow in porous media**  
Keywords: Multiscale problem, Darcy's law, single phase flow, anisotropic heterogeneous porous media, numerical upscaling, multigrid, domain decomposition, efficient preconditioner  
(18 pages, 2007)

122. M. Brickenstein, A. Dreyer  
**POLYBORI: A Gröbner basis framework for Boolean polynomials**  
Keywords: Gröbner basis, formal verification, Boolean polynomials, algebraic cryptanalysis, satisfiability  
(23 pages, 2007)

123. O. Wirjadi  
**Survey of 3d image segmentation methods**  
Keywords: image processing, 3d, image segmentation, binarization  
(20 pages, 2007)

124. S. Zeytun, A. Gupta  
**A Comparative Study of the Vasicek and the CIR Model of the Short Rate**  
Keywords: interest rates, Vasicek model, CIR-model, calibration, parameter estimation  
(17 pages, 2007)

125. G. Hanselmann, A. Sarishvili  
**Heterogeneous redundancy in software quality prediction using a hybrid Bayesian approach**  
Keywords: reliability prediction, fault prediction, non-homogeneous poisson process, Bayesian model averaging  
(17 pages, 2007)

126. V. Maag, M. Berger, A. Winterfeld, K.-H. Küfer  
**A novel non-linear approach to minimal area rectangular packing**  
Keywords: rectangular packing, non-overlapping constraints, non-linear optimization, regularization, relaxation  
(18 pages, 2007)

127. M. Monz, K.-H. Küfer, T. Bortfeld, C. Thieke  
**Pareto navigation – systematic multi-criteria-based IMRT treatment plan determination**  
Keywords: convex, interactive multi-objective optimization, intensity modulated radiotherapy planning  
(15 pages, 2007)

128. M. Krause, A. Scherrer  
**On the role of modeling parameters in IMRT plan optimization**  
Keywords: intensity-modulated radiotherapy (IMRT), inverse IMRT planning, convex optimization, sensitivity analysis, elasticity, modeling parameters, equivalent uniform dose (EUD)  
(18 pages, 2007)

129. A. Wiegmann  
**Computation of the permeability of porous materials from their microstructure by FFF-Stokes**  
Keywords: permeability, numerical homogenization, fast Stokes solver  
(24 pages, 2007)

130. T. Melo, S. Nickel, F. Saldanha da Gama  
**Facility Location and Supply Chain Management – A comprehensive review**  
Keywords: facility location, supply chain management, network design  
(54 pages, 2007)

131. T. Hanne, T. Melo, S. Nickel  
**Bringing robustness to patient flow management through optimized patient transports in hospitals**  
Keywords: Dial-a-Ride problem, online problem, case study, tabu search, hospital logistics  
(23 pages, 2007)

Status quo: November 2007